


WO 2004/033582

PCT/GB2003/004421

1/4

Graph 1 PERCENTAGE DEVIATION IN CAPACITY FROM R404A FOR
 R22, R407C AND THE HIGH R125 CONTAINING BLENDS BASED ON
 A MEAN EVAPORATING TEMPERATURE OF -30°C

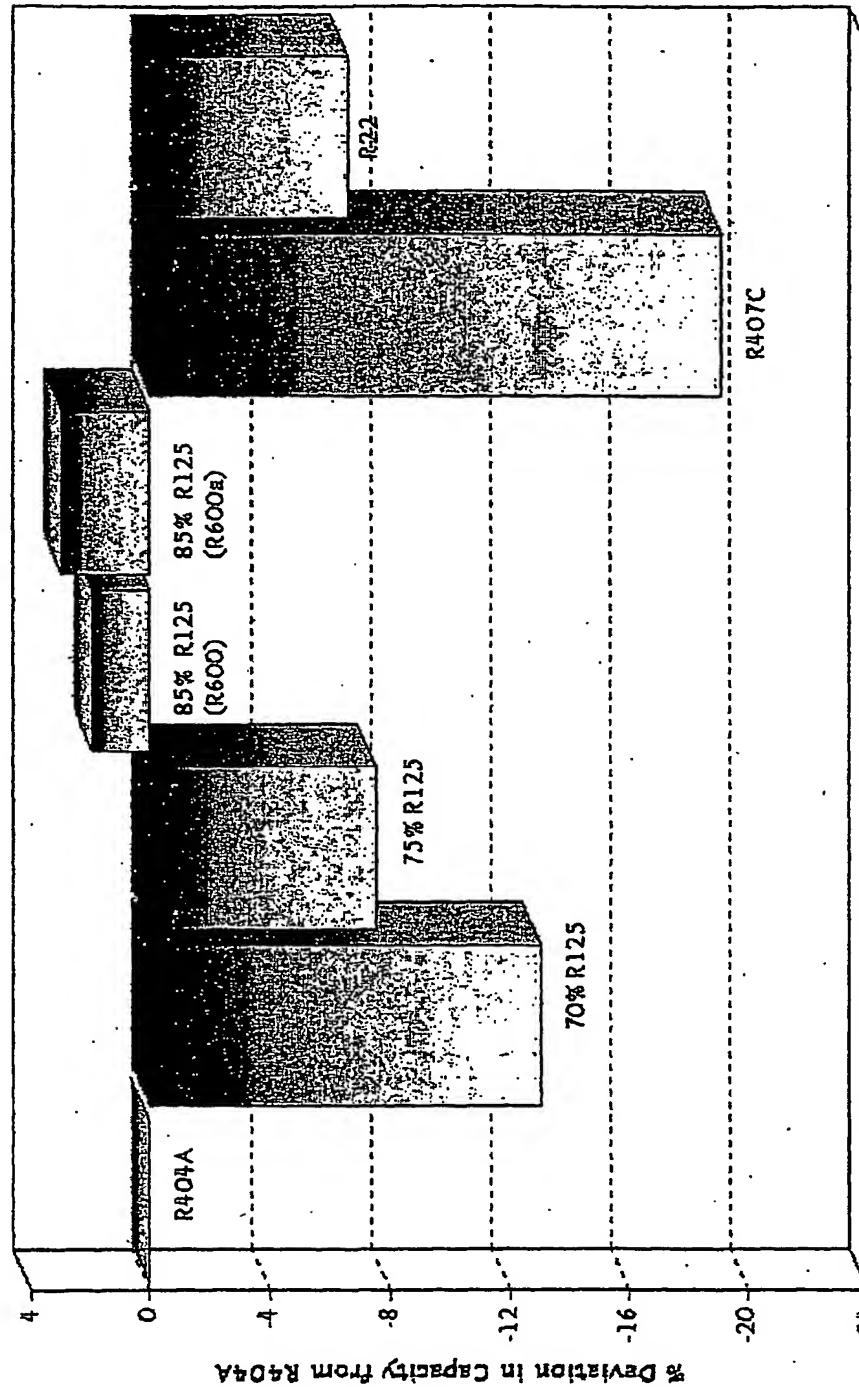


WO 2004/033582

PCT/GB2003/004421

2/4

Graph 2 PERCENTAGE DEVIATION IN COP FROM R404A FOR R22,
R407C AND THE HIGH R125 CONTAINING BLENDS BASED ON A
MEAN EVAPORATING TEMPERATURE OF -30°C

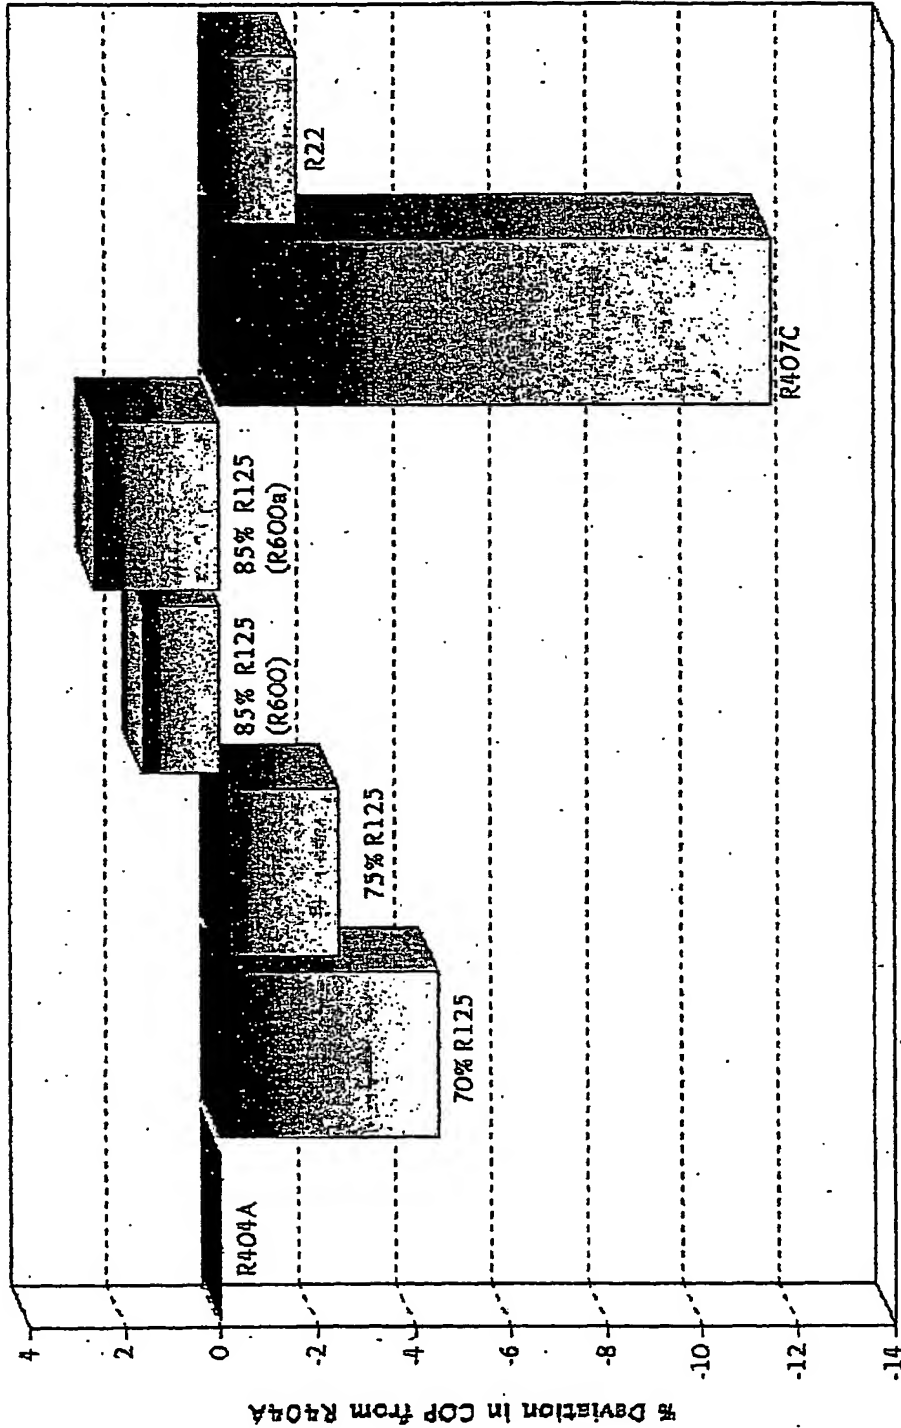


WO 2004/033582

PCT/GB2003/004421

3/4

GRAPH 3 PERCENTAGE DEVIATION IN CAPACITY FROM R22 FOR R404A, R407C AND THE HIGH R125 CONTAINING BLENDS BASED ON THE MEAN EVAPORATING TEMPERATURE

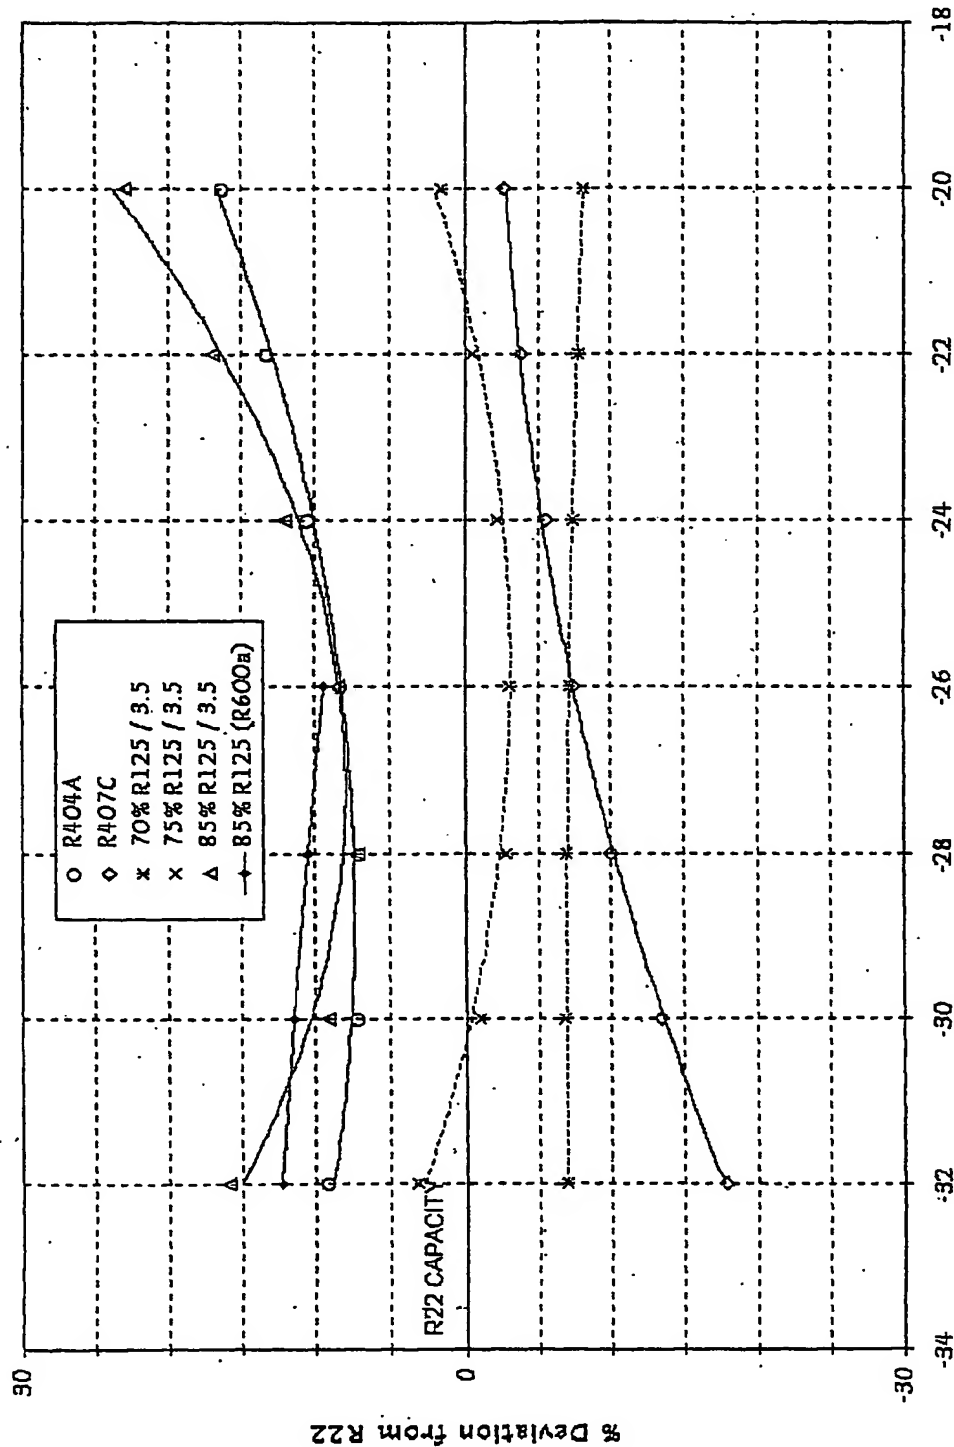

WO 2004/033582

PCT/GB2003/004421

4/4

GRAPH 4. PERCENTAGE DEVIATION IN COP FROM R22 FOR R404A, R407C AND THE HIGH R125 BLENDS BASED ON THE MEAN EVAPORATING TEMPERATURE

